



Gerard Senator

Specific Installation Instructions

Roof pitch	15-90°
Overall length	1320 mm
Length of cover	1250 mm
Width of cover	368 mm
Upstand	16 mm
Roof cover/panel	0.46 m ²
Coverage	2.2 panel/m ²
Textured unit weight	3.0 kg

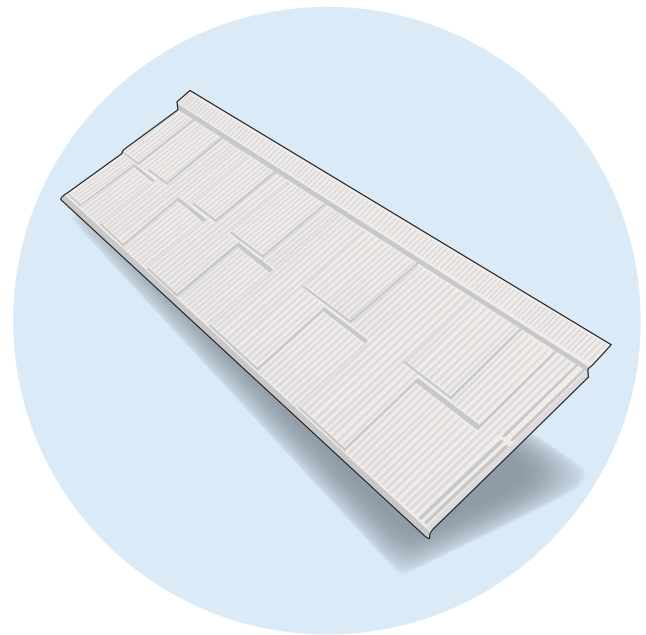


Dimensions and weights given are nominal.

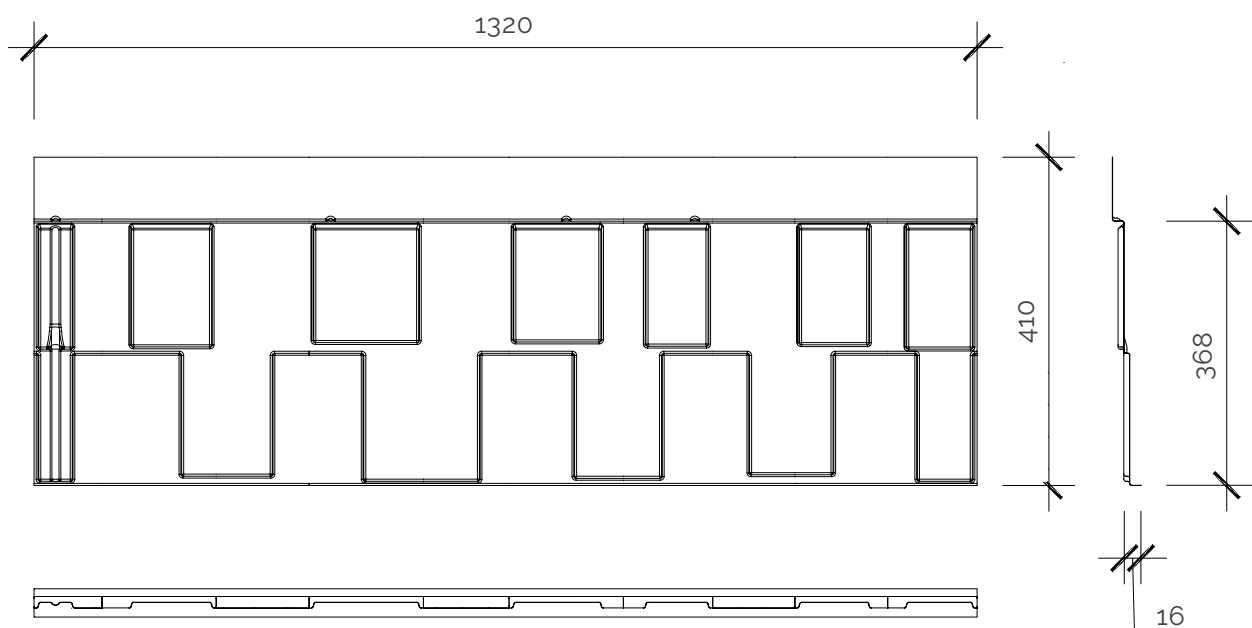

The worry-proof roof.®

Gerard Senator Panel Installation – Nailing Position

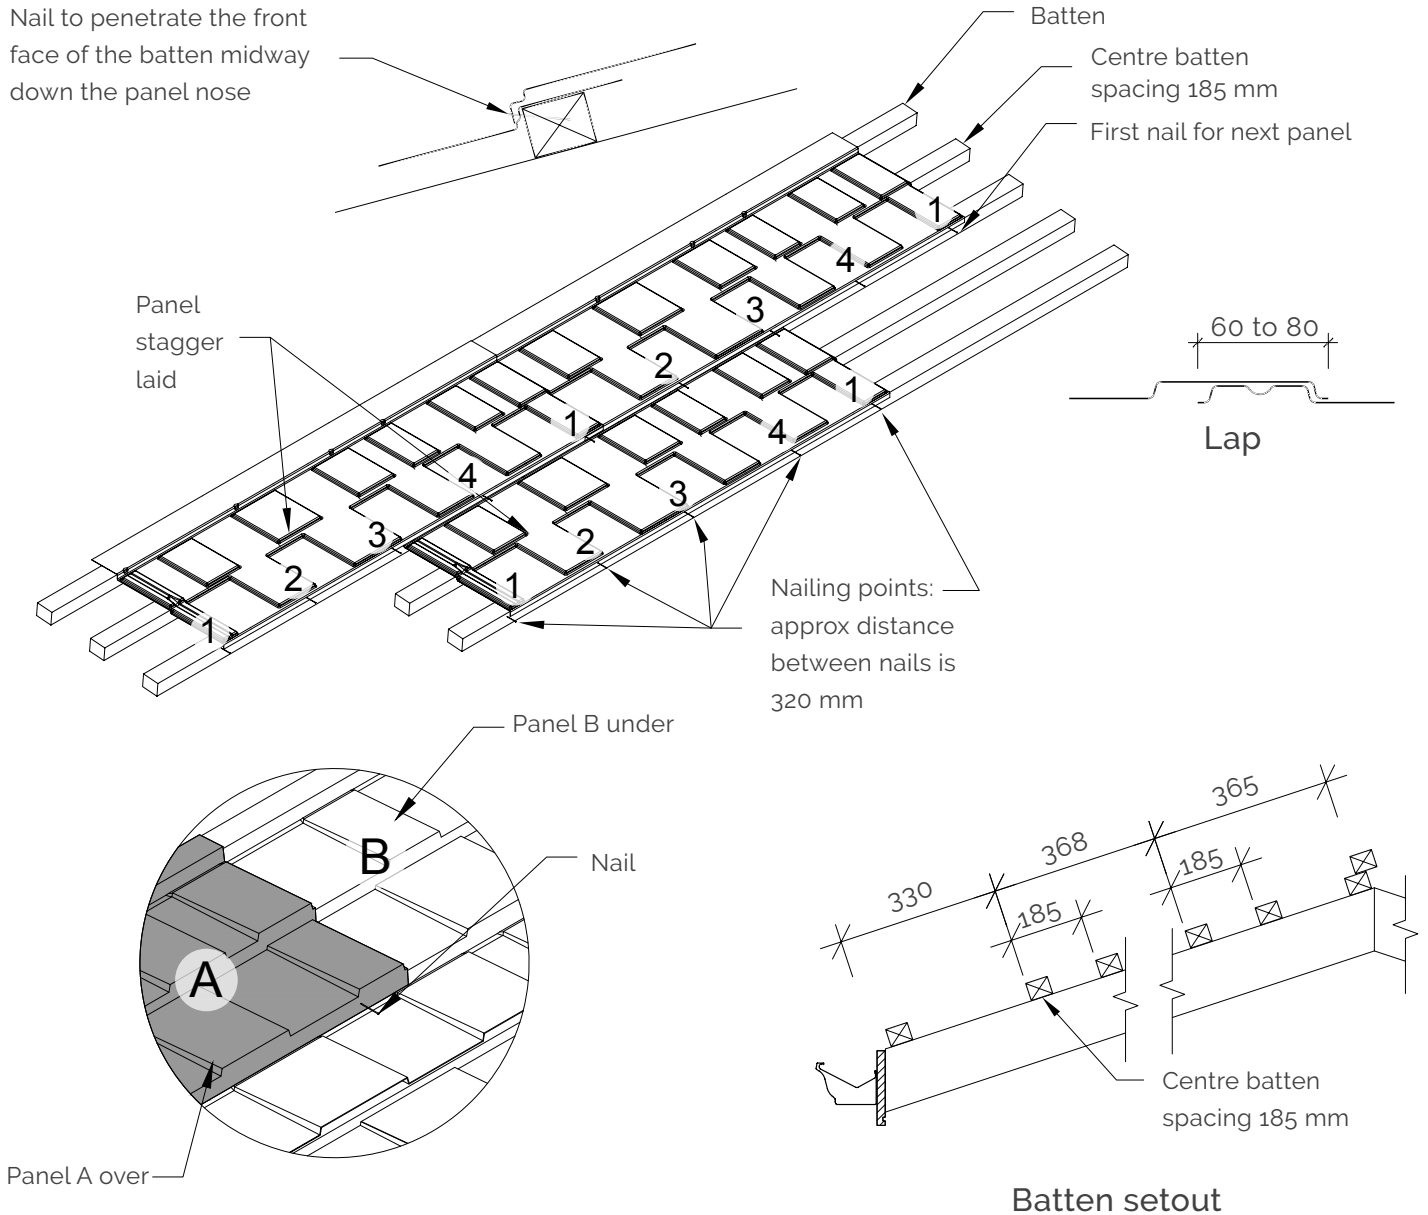

Fixing

- The nose of each panel is held down at 5 points.
- This comprises 4 nails as per the diagrams plus the nailed overlap panel.

Fastening panels in Cyclone Areas

- Where a building has been designed outside the scope of NZS 3604. Panels on buildings with a wind load design of above 3.8 kPa should be fastened at approx 160 mm spacing (each module).